

HIGH RESOLUTION, RADIOMETRIC GIMBALED THERMAL ZOOM DRONE PAYLOAD

VUE® TZ20-R



Made in the USA, the radiometric Vue TZ20-R thermal-zoom drone payload enables DJI V2 Matrice 200 series and 300 pilots to see and measure thermal details, increasing the value and extending the lifetime of their drone fleet. The Vue TZ20-R features two FLIR Boson® thermal cameras that put four times more pixels on target at every zoom level versus all competition and offers an unmatched 20x zoom capability.


Utility, roofing, solar farm, and other industrial inspectors can zoom into objects of interest, identify them with unmatched clarity, and take and record radiometric temperature measurements, all from a safe standoff distance. Emergency response pilots in search and rescue, law enforcement, firefighting, and public safety can search for and observe in silence while using the thermal zoom to reduce false positives and make critical decisions faster with the affordable VUE TZ20-R. The combination of performance-leading thermal zoom and radiometry enables more efficient missions with faster search, silent surveillance, and safer stand-off inspections.



SEARCH AND INSPECT MORE AREA IN LESS TIME

Unmatched thermal zoom performance and clarity at 5x, 10x, and 20x

- Scan and survey large areas with wide, 95-degree field of view (FOV)
- Zoom in quickly with narrower, 18-degree FOV and additional digital zoom levels
- Use battery power more efficiently

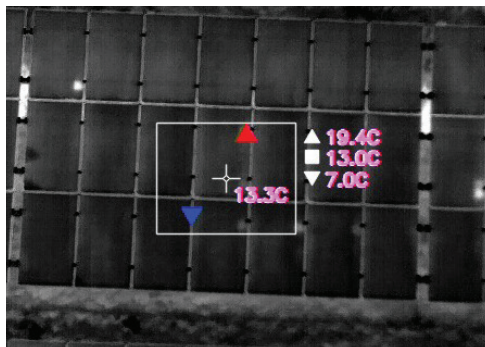

SAFELY AND ACCURATELY MEASURE TEMPERATURE FROM FARTHER AWAY

Dual Bosons provide 4x more radiometric pixels on target at every zoom levels versus all competitors

- Measure accurate thermal detail with 640 x 512 resolution Boson thermal camera modules
- Set isotherms to automatically detect objects of interest
- Utilize zoom to conduct mission at safe standoff distance



MARK MORE WITH MATRICE

Plug and play with DJI Matrice 300, DJI V2 Matrice 200 series, and post-process reporting software

- Connect with Skyport V2.0 gimbal
- Use in-app thermal features and record on dual microSD cards
- Analyze thermal data in FLIR Thermal Studio and third-party applications

For More Information Visit:
www.flir.com/vue-tz20-r

www.teledyneflir.com



Imagery for illustration purposes only. Specifications are subject to change without notice. ©2021 Teledyne FLIR LLC, Inc. All rights reserved.
12/14/2022 REV1

SPECIFICATIONS

Overview	
Dimensions	Payload: 75 x 70 x 55 mm (2.95 x 2.75 x 2.17 in) With gimbal: 128 x 154x 141 mm (5.04 x 6.06 x 5.55 in)
Weight	640 g
Mechanical Interface	Skyport 2.0 connector, X-Port DJI gimbal
Electrical Interface	Skyport 2.0, 13.6V/2A
Array format	2 FLIR Boson 640 x 512
Pixel Pitch	12 µm LWIR
IR Camera Optics	Wide FOV: 95° HFOV, 4.9 mm EFL Narrow FOV: 18° HFOV, 24 mm EFL
Thermal sensitivity	85 mK @ F/1.0
Zoom	5x optical (WFOV/NFOV), 4x digital Effective zoom: 1x (95°), 5x, 10x, 20x (4.5°)
Recording	Still: Radiometric JPEG, TIFF Video: MPEG (same as streaming), Radiometric CSQ Multipage TIFF: wide and narrow FOV
Streaming	640 x 512 @ 30 Hz
Storage	2 micro SD cards, 2x64GB included, supports 2x256GB
Ground control	DJI Pilot App
Gimbal	3-axis Pitch: 30° to -120° Yaw: ±320°
Airframe compatibility	DJI V2 Matrice 200-series and Matrice 300
Operational & Storage Temperature	-20° to 60°C (-4° to 140°F)
Environmental sealing	IP44

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.flir.com/vue-tz20-r

UNMATCHED THERMAL ZOOM PERFORMANCE AND CLARITY

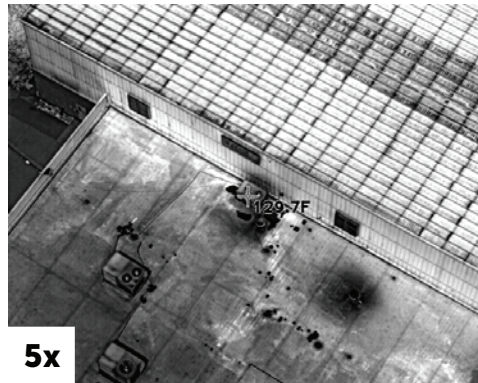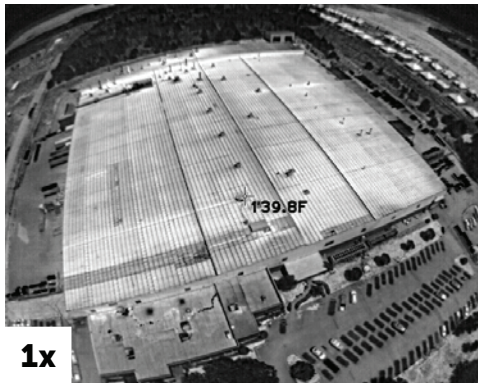

SANTA BARBARA
Teledyne FLIR LLC, Inc.
6769 Hollister Ave.
Goleta, CA 93117
PH: +1 805.690.6602

EUROPE
Teledyne FLIR LLC, Inc.
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5106

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2021 Teledyne FLIR LLC, Inc.

Approved for public release. Teledyne FLIR Approved [FLIRGTC-SBA-001]

All rights reserved. Revised 12/14/2022

21-0818-OEM-COR-VUE-TZ20-R-Data-Sheet-LTR

For More Information Visit:
www.flir.com/vue-tz20-r

www.teledyneflir.com