


PHASE**ONE**



P3 UAV Camera

Unmatched inspection | mapping

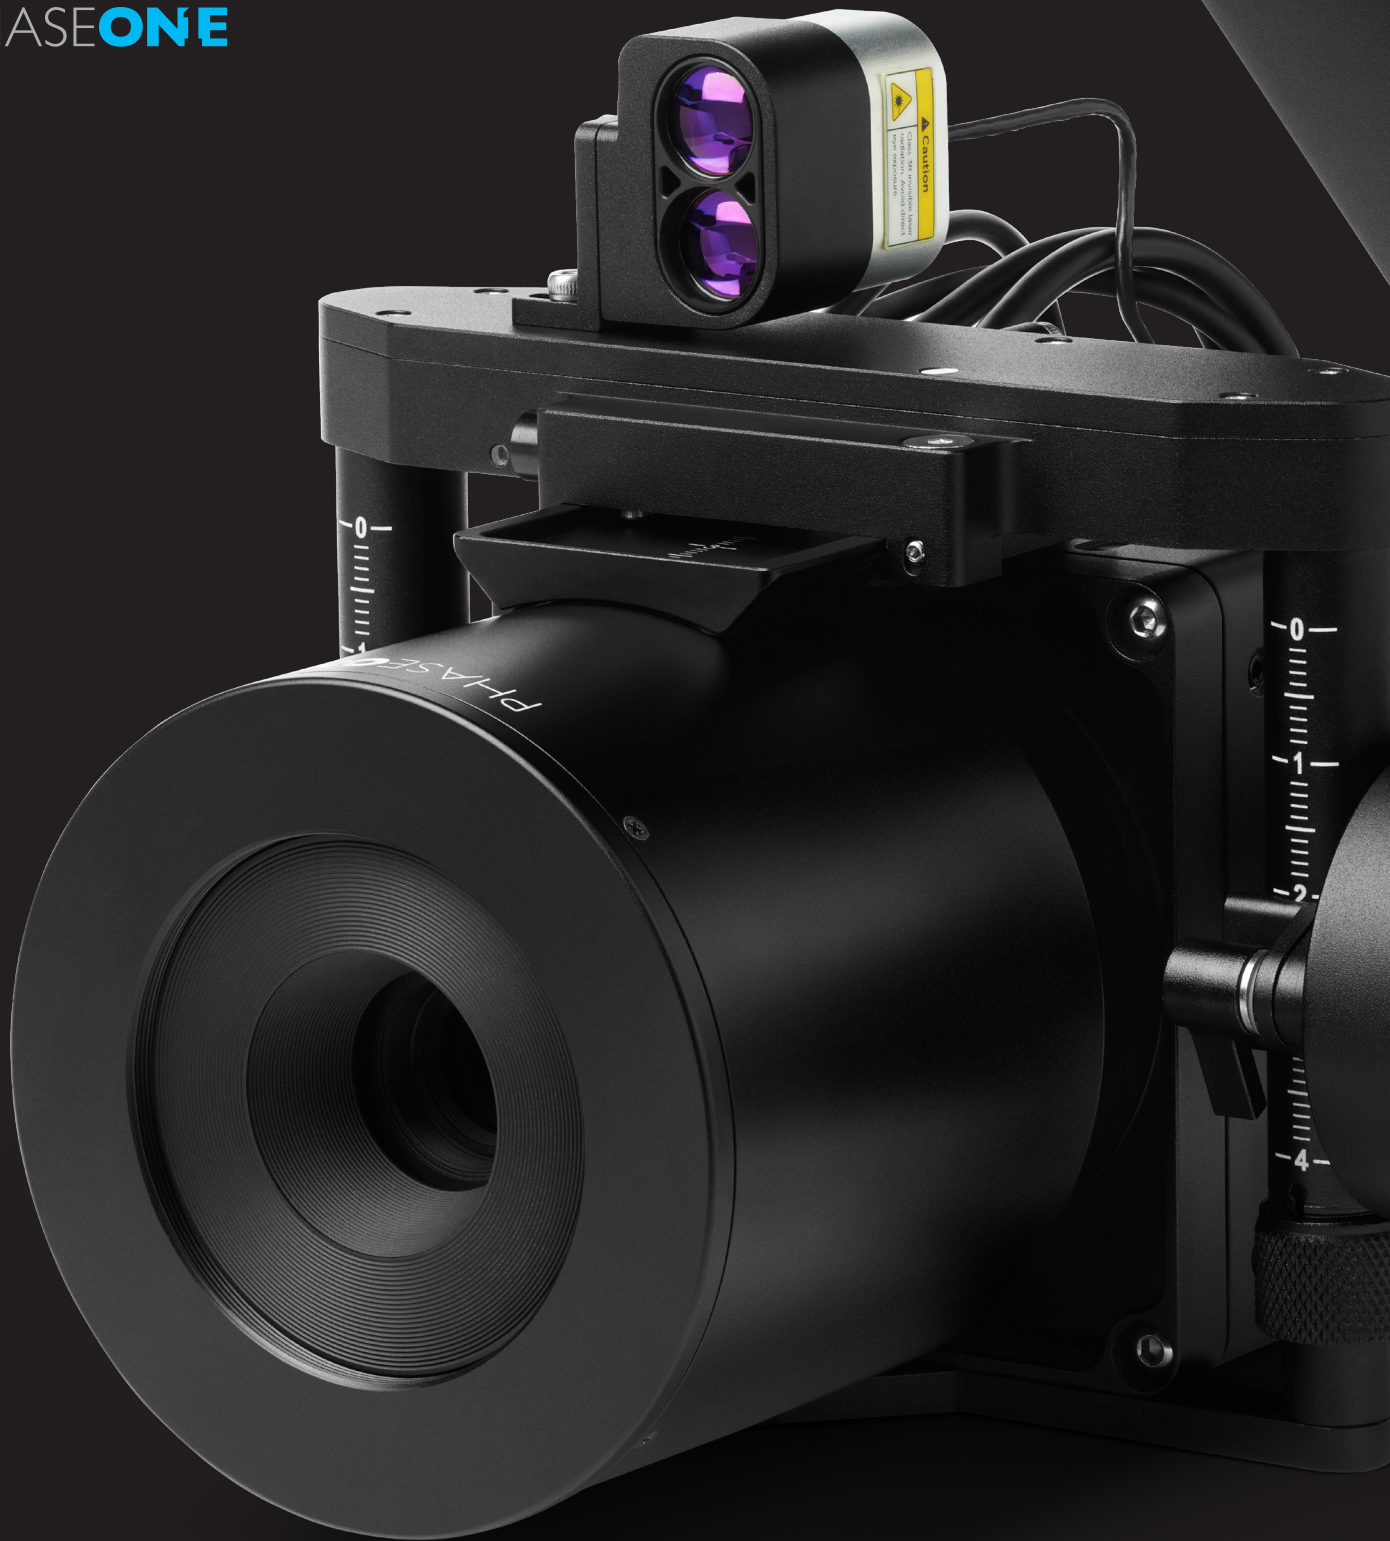


The finest details from the furthest distance

To deliver unmatched performance, Phase One P3 is designed to maximize the productivity of the most demanding inspection projects where time, safety, and image details are paramount for success.

Ready-for-flight with DJI M400/M350 and ready-for-integration with MAVLink/Auterion drones, the P3 boosts your productivity through its ease of installation, superior data output, and uncompromised image details.


Featuring a medium-format Phase One iXM camera with a sensor 1.7 times larger than other cameras, the P3 excels at capturing more details in each frame.

P3 offers you the advantage of unparalleled dynamic range and a versatile selection of lenses, spanning from 35 mm to 150 mm*.




Best-in-class sensor performance

Make the most of every flight by capturing more in every shot with the largest image sensor.



Flexible configuration for every need

Get more value out of your inspection by switching between vertical and horizontal configurations to collect data faster and reduce background noise.



More details from a distance

Get detailed data from the safest distance while covering a large area choosing from a variety of our lenses.



Smart capture for robust results

Make every shot count easily capturing complex assets and moving objects with smart focusing and triggering.

* 150 mm lens not supported for DJI M300/M350

Make no compromises on image quality


Customize your drone to meet your project requirements

By offering a variety of lens options you can customize your drone according to your priorities; whether you want to achieve the broadest coverage or the finest detail.



Boost your productivity with flexible configuration

Depending on the type of asset to inspect, you can switch your P3 configuration from horizontal to vertical and vice versa to reduce background noise and collect data faster.

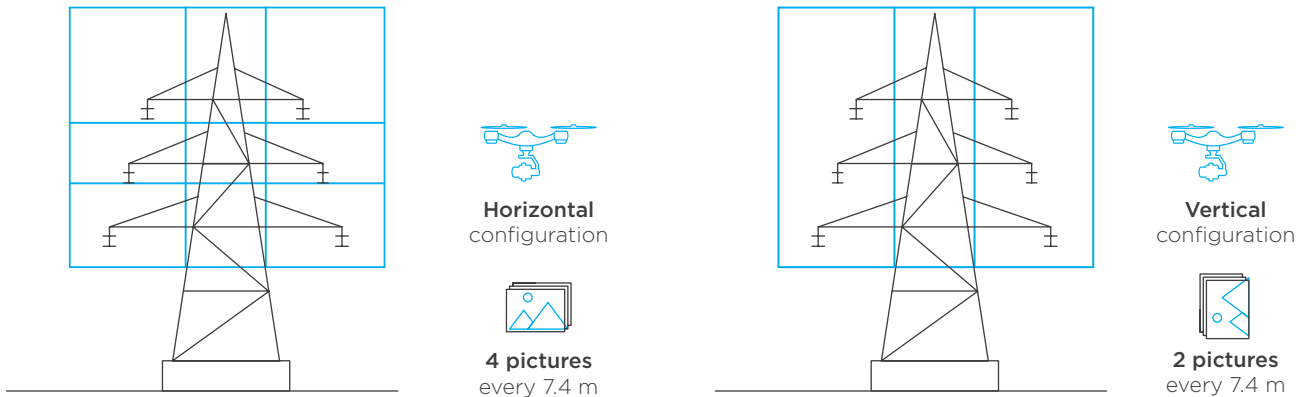

Flexible camera configuration

Vertical and horizontal camera orientation.

End-to-end integration

P3 Payload can easily be integrated with the most recognized UAV systems DJI M400/M350 and MAVLink/Auterion.

Versatile platform support

Interface to DJI and MAVLink/Auterion UAVs or use the Phase One toolbox for seamless integration with your existing workflows.

Smart focusing

Built-in laser range finder to ensure consistent focus in complex and high contrast situations.

Smart triggering

Automatic and continuous distance measuring triggering a capture for fast moving objects.

Wide range of lenses

35 mm, 80 mm, 80 mm AF, 150 mm AF lenses to meet your GSD requirements from any distance without compromising on safety.

Medium format sensor

120 & 100 MP sensors ensure largest coverage, highest dynamic range, and smallest GSD on the market.

3-Axis stabilization

Pitch and yaw control of the gimbal providing better image stability.



P3 payload delivers unmatched performance

Image sensor & camera	P3 DJI	P3 MAVLink/Auterion
Weight with 80 mm AF lens without payload mount (kg)	2.5	2.5
120 MP & 100 MP sensors available	Medium format sensor iXM-100 (rolling shutter) iXM-GS120 (electronic Global Shutter)	Medium format sensor iXM-100 (rolling shutter) iXM-GS120 (electronic Global Shutter)
Environmental rating	IP53 (iXM only)	IP53 (iXM only)
Gimbal stabilization	3 axis	3 axis
Laser range finder (max effective range)	Approximately 90 m	Approximately 90 m
Camera control (key features)	ISO, shutter speed, exposure, AE, focus distance AF/MF, LRF range max/min, focus peaking	ISO, shutter speed, exposure, AE, focus distance AF/MF, LRF range max/min, focus peaking
Camera control (metadata)	EXIF (incl. IMU & Custom Field), ICC Profile, XMP (incl. GPS) & IPTC	EXIF (incl. IMU & Custom Field), ICC Profile, XMP (incl. GPS) & IPTC
Live view	HDMI	HDMI
Camera orientation	Vertical and horizontal	Vertical and horizontal
Smart focusing	Auto focus based on LRF input	Auto focus based on LRF input
Flight planning software	DJI pilot	Q Ground Control & Mission Planner
Electric interface	Skyport V3/V2	HDMI, Telemetry, USB-c
Software interface	Support for PSDK & MSDK	Support for MAVLink/Auterion Protocol v1 and v2
Hardware compatibility *	DJI M300 / M350 (with M300/M350 mount assembly) DJI M400 (with M400 mount assembly)	MAVLink/Auterion based platforms Cube Orange & PixHawk 4.0

* P3 is a modular system consisting of camera & lens, gimbal, and drone mount assembly. Existing P3 DJI M300/M350 customers can upgrade to DJI M400 by purchasing the P3 DJI M400 mount kit, while retaining their existing camera, lens, and gimbal.

Lenses technical specifications		35 mm	80 mm	80 mm AF	150 mm AF
Lens composition		12 elements in 8 groups	8 elements in 5 groups	8 elements in 5 groups	8 elements in 7 groups
Minimum focusing range		infinity	3 m to infinity	3 m to infinity	10 m to infinity
Shutter speed max (sec)		1/2500	1/2500	1/2500	1/2500
Exposure control		1/3 f – stop increments	1/3 f – stop increments	1/3 f – stop increments	1/3 f – stop increments
Aperture range		f/5.6 – f/22	f/5.6 – f/22	f/5.6 – f/22	f/5.6 – f/22
Filter diameter (mm)		58	58	58	58
Angle of view – long side (°)	120 MP sensor	64.4	30.8	30.8	16.7
	100 MP sensor	64.1	30.7	30.7	16.6
Angle of view – short side (°)	120 MP sensor	50.2	23.3	23.3	12.6
	100 MP sensor	50.3	23.2	23.2	12.5
Entrance pupil to image plane (mm)		72	85	85	107







Flying with MAVLink | Auterion

P3 MAVLink/Auterion is ready to integrate. It is designed to significantly reduce your time to market by fast-tracking your integration efforts. You have the freedom to customize the integration to your specific platform and application requirements.

P3 for MAVLink/Auterion provides:

- Full compatibility with your MAVLink/Auterion drone enabling you to offer it as a turnkey solution for new markets.
- Complete documentation of the open-source software, and electrical and mechanical interface, simplifying integration.
- Your choice of MAVLink/Auterion Ground Control Software through the MAVLink/Auterion Camera Protocol.



Flying with DJI

The P3 camera is a plug-and-play solution ready to integrate into your existing workflow. With DJI compatibility, it ensures maximum value delivery for your customers.

P3 for DJI platforms provides:

- Seamless integration with the DJI Pilot App eliminating the need to retrain your pilots.
- Compatible with third party software via DJI Mobile SDK.
- Maximum utilization and uptime of your existing fleet by opening up new applications.



About Phase One

Phase One is a global leader in digital imaging technology. Our commitment to imaging quality spans a wide spectrum of applications, from professional photography to heritage digitization, industrial inspections, aerial mapping, security and space.

With over three decades of innovation, Phase One has pioneered core imaging technologies and a range of digital cameras and imaging modules, setting new standards for image quality in terms of resolution, dynamic range, color fidelity and geometric accuracy. Together with its customers, technology partners and its global network of distributors, Phase One drives the imaging industry forward.

We deliver Imaging Beyond Imagination.

www.phaseone.com

